

KT-31MB Series (RoHS)

FEATURES

- Low pitch sound, medium sound output
- Low current consumption
- Extremely durable, long life
- Ultra small size, easy to install


APPLICATIONS

Alarm clock, timer, burglar and fire alarm, portable battery operated equipment, electronic cash register, automobile electronics




ABS Housing Material
Color: Black

DIMENSIONS (unit in mm)

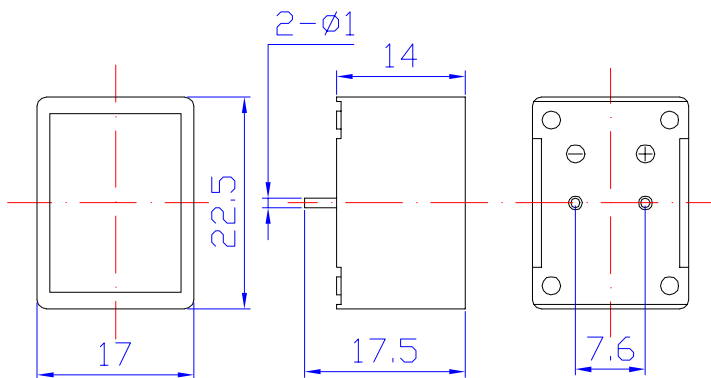

CHARACTERISTICS

e.g. KT-31MB0412P

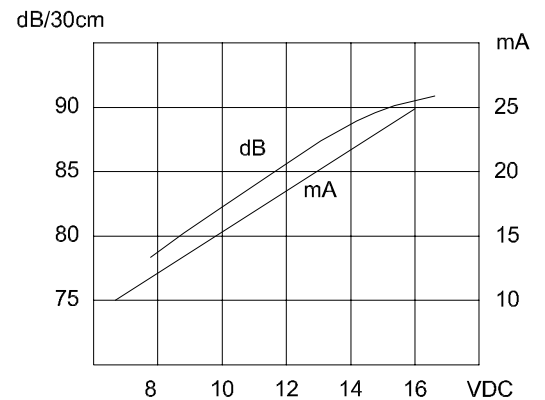

SPECIFICATIONS (all data taken at 25 °C unless otherwise specified)

Model Number	Unit	KT-31MB 0401PR	KT-31MB 0403PR	KT-31MB 0406PR	KT-31MB 0409PR	KT-31MB 0412PR	KT-31MB 0424PR
Rated Voltage	V	1.5	3	6	9	12	24
Operating Voltage	V	1 ~ 3	2 ~ 4	4 ~ 8	6 ~ 12	9 ~ 15	15 ~ 27
*Rated Current	mA	20		25		30	
*Sound Output @ 30cm	dB	70			75		
Fundamental Frequency	Hz	400 ± 50					
Tone Nature		Continuous					
Operating Temperature	°C	-20 ~ +65					
Weight	g	8					

* Value applying rated voltage, DC