

TPA24A6005P

FEATURES

- Compact size
- Low current consumption
- PCB mounting


APPLICATIONS

Various office equipment, computer peripherals,
home appliances




ABS Housing Material, Black

DIMENSIONS (Unit in mm)

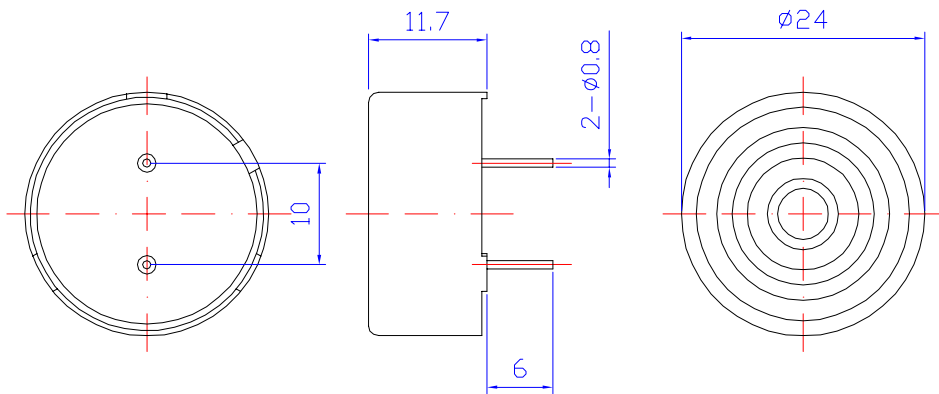

FREQUENCY RESPONSE

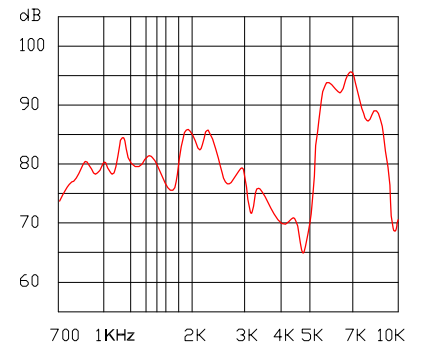

SPECIFICATIONS (all data taken at 25 °C unless otherwise specified)

Model Number	Unit	TPA24A6005P
Rated Voltage	Vp-p	5
Operating Voltage	Vp-p	1~ 30
*Max. Rated Current	mA	3
*Sound Output @ 10cm	dB	85
Resonant Frequency	Hz	6,000 ± 500
Capacitance at 1,000Hz	pF	12000±30%
Operating Temperature	°C	-20 ~ +60
Weight	g	4

* Value Applying Rated Voltage (Resonant Frequency, 1/2 duty, Square Wave)